

RAY90

NFC Reader

ARMv7-M core 204Mhz

Flash 1Mbyte Ext. 1Mbyte SRAM 1Mbyte




Easily install and use where NFC Reader are needed.

Compact & Tiny size 63.5mm X 63.5mm

Stable docking with a dedicated cradle

Extensive Connectivity and Integration With Various Devices

Supports high-performance Barcode scanning and NFC Reader

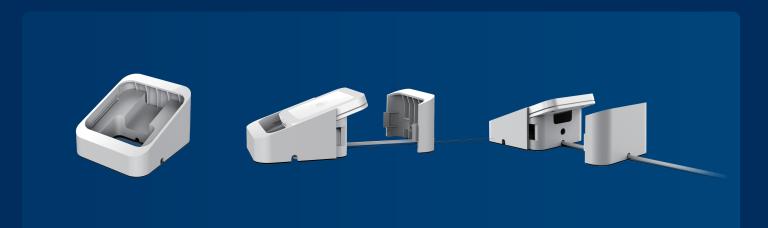

Stable docking with a dedicated cradle

Features & Benefits



Specification

Processor

ARMv7-M core, 204Mhz

O/S F/W Peripheral port 5 PIN Wire Cable

Contact Port

4 PIN Gold Plate Terminal

Sound Buzzer Operating Temperature

0°C to +50 °C

Power Supply

5V 500mA

Dimension

63.5mm(W) X 63.5mm(H) X 9.5mm(D)

Dimension(+Cradle)

80.23mm X 69.23mm X44.75mm

Memory

Flash 1Mbyte, Ext. 1Mbyte SRAM 1Mbyte Certification

ISO 14443 Type A/B, ISO18092, Mifare, Felica EMV CL1. AMEX VISA, MASTER, JCB, CUP FCC, CE, KC







